

Insulated Fire Rated Access Doors for Walls & Ceilings

KRP-150FR



The KRP-150FR is insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls, and may be used in a 2 hour fire rated wall assembly. Additionally, Warnock Hersey rates the KRP-150FR for 3 hours in ceilings.


Specifications

Access doors shall be type KRP-150FR.

- Frame and trim shall be 16 gauge steel, trim 1" wide.
- Door shall be 20 gauge steel, welded pan type filled with 2" thick fire-rated insulation and shall open to 175°, be self-latching with automatic closer and interior latch release.
- Hinge shall be continuous piano hinge.
- Latches shall be spring loaded sliding bolt type keyed paddle latch, all keyed alike. Door can be prepared for a Rim Cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.



New Paddle Latch for Added Security!

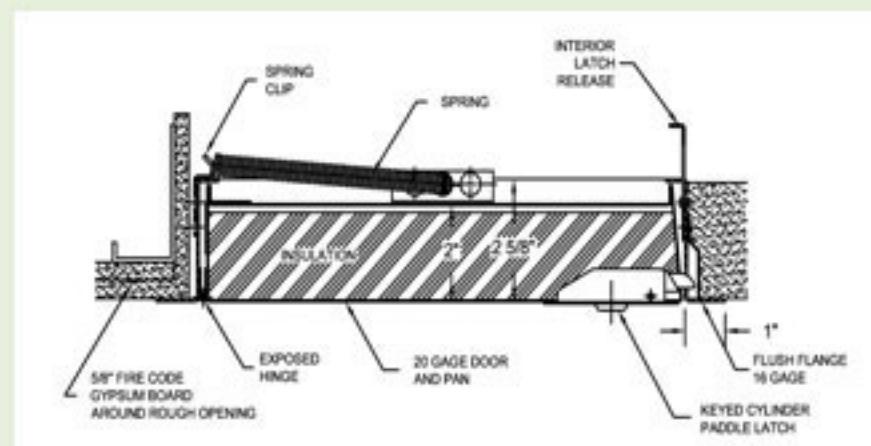

* These sizes also standard in stainless steel.
Special sizes and modifications available on request.

** Not for ceiling application.

KRP-350FR




The KRP-350FR is insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls, and may be used in a 2 hour fire rated wall assembly. Additionally, Warnock Hersey rates the KRP-350FR for 3 hours in ceilings.

The KRP-350FR has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal the flange.

Specifications

Access doors shall be type KRP-350FR.

- Frame shall be 16 gauge steel, surrounded by galvanized drywall bead.
- Door shall be 20 gauge steel, welded pan type filled with 2" thick fire-rated insulation and shall open to 175°, be self-latching with automatic closer and interior latch release.
- Hinge shall be continuous piano hinge.
- Latches shall be spring loaded sliding bolt type keyed paddle latch, all keyed alike. Door can be prepared for a Rim Cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.

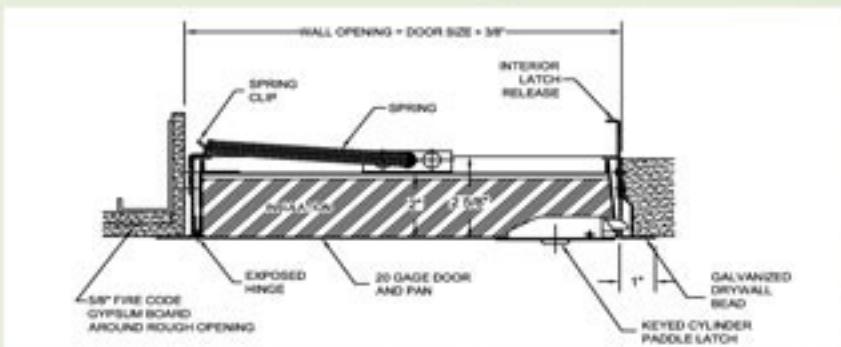

Standard Sizes

Door Size (H x W)	Wall Opening	# of Latches	Shipping Wt. (lbs.) KRP-150	Shipping Wt. (lbs.) KRP-350
8 x 8	8 3/8 x 8 3/8	1	6.3	6.1
12 x 12*	12 3/8 x 12 3/8	1	9.7	9.3
14 x 14	14 3/8 x 14 3/8	1	12.7	12.2
16 x 16*	16 3/8 x 16 3/8	1	14.1	13.6
18 x 18*	18 3/8 x 18 3/8	1	18.9	18.2
24 x 12	24 3/8 x 12 3/8	1	15.5	14.9
22 x 22	22 3/8 x 22 3/8	1	24.0	23.5
24 x 24*	24 3/8 x 24 3/8	1	26.7	25.7
30 x 22	30 3/8 x 22 3/8	1	27.8	26.8
30 x 24	30 3/8 x 24 3/8	1	32.2	31.0
30 x 30**	30 3/8 x 30 3/8	1	37.7	36.3
32 x 32**	32 3/8 x 32 3/8	1	41.3	39.8
36 x 22	36 3/8 x 22 3/8	2	34.4	33.1
36 x 24*	36 3/8 x 24 3/8	2	40.2	38.7
36 x 36**	36 3/8 x 36 3/8	2	52.0	50.1
48 x 24**	48 3/8 x 24 3/8	2	48.9	47.1
48 x 36**	48 3/8 x 36 3/8	2	62.0	59.7
48 x 48**	48 3/8 x 48 3/8	2	89.0	85.7

The largest size available for ceiling installation is 36" x 24"

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com