

Non-Insulated Fire Rated Access Doors for Walls Only

KRP-250FR



The KRP-250 is non-insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls, and may be used in a 2 hour fire rated wall assembly.

Specifications

Access doors shall be type KRP-250FR

- Frame and trim shall be 16 gauge steel with corners welded and ground smooth; trim 1" wide.
- Door shall be 16 gauge steel and open to 175°, be self-latching with automatic closer and interior latch release.
- Hinge shall be continuous piano hinge.
- Latches shall be spring loaded sliding bolt type keyed paddle latch, all keyed alike. Door can be prepared for a Rim Cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.



KRP-450FR




The KRP-450 is non-insulated and rated by Underwriters Laboratories for 1.5 hour "B" label in walls, and may be used in a 2 hour fire rated wall assembly.

The KRP-450FR has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal the flange.

Specifications

Access doors shall be type KRP-450FR

- Frame shall be 16 gauge steel, surrounded by galvanized drywall bead.
- Door shall be 16 gauge steel and open to 175°, be self-latching with automatic closer and interior latch release.
- Hinge shall be continuous piano hinge.
- Latches shall be spring loaded sliding bolt type keyed paddle latch, all keyed alike. Door can be prepared for a Rim Cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.

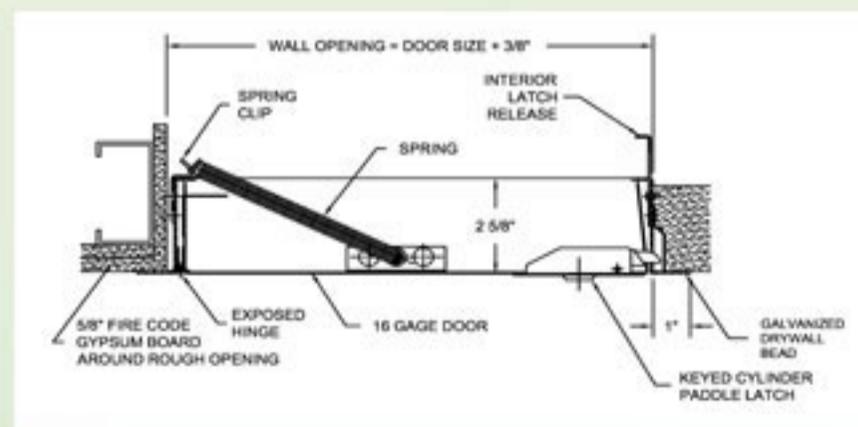

Door Size (H x W)	Wall Opening	# of Latches	Standard Sizes	
			Shippin Wt. (lbs.) KRP-250	Shipping Wt. (lbs.) KRP-450
8 x 8*	8 3/8 x 8 3/8	1	5.1	4.3
12 x 12*	12 3/8 x 12 3/8	1	8.5	7.2
14 x 14	14 3/8 x 14 3/8	1	9.8	8.3
16 x 16	16 3/8 x 16 3/8	1	11.7	9.9
18 x 18*	18 3/8 x 18 3/8	1	13.8	11.7
24 x 24*	24 3/8 x 24 3/8	1	20.5	17.4
30 x 22	30 3/8 x 22 3/8	1	22.6	19.1
30 x 30	30 3/8 x 30 3/8	1	28.2	23.9
36 x 24	36 3/8 x 24 3/8	2	28.5	24.1
36 x 36	36 3/8 x 36 3/8	2	39.6	33.5

* These sizes also standard in stainless steel.
Special sizes and modifications available on request.

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com