

Access Doors For Plaster Installations

DSC-210PL

The DSC-210PL is recessed 1/2" and lined with self-furring metal lath allowing plaster of surrounding surfaces to continue without interruption over face of door.

Specifications

Access doors shall be type DSC-210PL

- Frame is 14 gauge steel and surrounded by 22 gauge expansion casing bead with metal lath.
- Door is 16 gauge steel, recessed 1/2" and lined with self furring 3.4 flat rib galvanized steel lath.
- Hinge shall be concealed pivoting rod type.
- Locks shall be flush to finished surface and shall be screwdriver operated with stainless steel cam and stud or cylinder lock with dust shutter.
- Brass sleeves shall be welded to door to protect plaster around stainless steel cam and stud.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.





DSC-214PL

The DSC-214PL has an expansion casing bead with galvanized lath providing a neat, tight protected finish between frame and plaster, while furnishing added plaster reinforcement.

Specifications

Access doors shall be type DSC-214PL

- Door is 14 gauge steel.
- Frame is 16 gauge steel and surrounded by 22 gauge expansion casing bead with metal lath.
- Hinge shall be concealed continuous piano hinge.
- Latches shall be flush and screwdriver operated, or shall be key operated cylinder lock with automatic dust shutter.
- Finish is prime coat of rust inhibitive electrostatic powder, baked grey enamel.

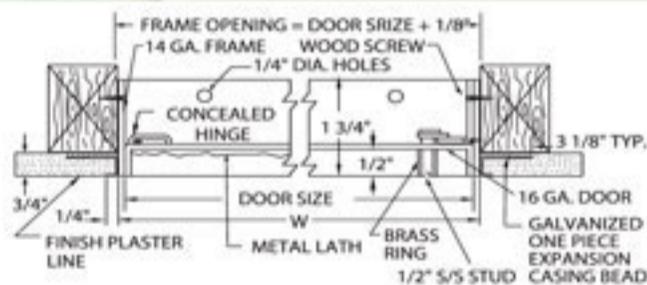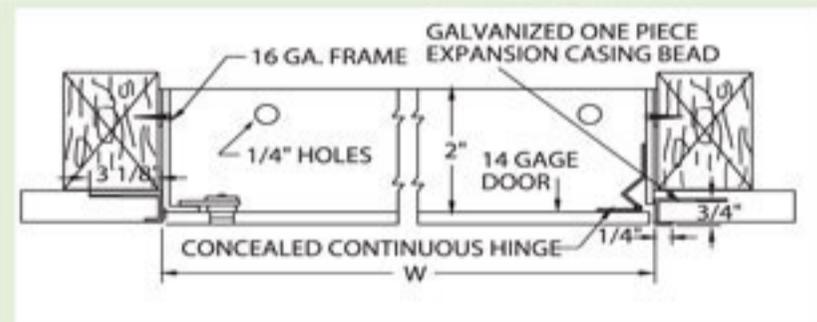

Standard Sizes			
Door Size (HxW)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
12 x 12	12 1/8 x 12 1/8	1	6.7
18 x 18	18 1/8 x 18 1/8	2	12.4
24 x 12	24 1/8 x 12 1/8	2	10.6
24 x 24	24 1/8 x 24 1/8	2	19.2
36 x 24	36 1/8 x 24 1/8	2	32.0

Special sizes and modifications available on Request.

Standard Sizes			
Door Size (HxW)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
8 x 8	8 3/8 x 8 3/8	1	3.5
10 x 10	10 3/8 x 10 3/8	1	4.5
12 x 12	12 3/8 x 12 3/8	1	6.0
14 x 14	14 3/8 x 14 3/8	2	8.5
16 x 16	16 3/8 x 16 3/8	2	11.0
18 x 12	18 3/8 x 12 3/8	2	10.0
18 x 18	18 3/8 x 18 3/8	2	13.0
20 x 16	20 3/8 x 16 3/8	2	14.0
24 x 12	24 3/8 x 12 3/8	2	12.0
24 x 20	24 3/8 x 20 3/8	2	17.0
24 x 24	24 3/8 x 24 3/8	5	20.0
30 x 20	30 3/8 x 20 3/8	5	21.0
30 x 24	30 3/8 x 24 3/8	5	23.5
30 x 30	30 3/8 x 30 3/8	5	30.0
36 x 24	36 3/8 x 24 3/8	5	28.0
36 x 36	36 3/8 x 36 3/8	5	39.0

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com