

# Roof Hatches

**IMPROVED**

Karp roof hatches are standard in aluminum (KRHA) and galvanized (KRHG). The hatch cover opens easily and remains open safely during use. The clear hatch opening is unobstructed.



## Specifications

Access doors shall be type KRHG or KRHA.

- Curb is 12" high, 14 gauge galv. steel or .125 aluminum, integral counterflashing, 3 1/2" wide mounting flange and 1" exterior fiberboard insulation with corner guards.
- Cover is 14 gauge galvanized steel or .125 aluminum with 22 gauge galvanized liner.
- Cover shall be assisted by enclosed compression springs.
- Cover shall be mounted on steel butt hinges with brass pin and be complete with closed-cell rubber weather seal, automatic hold open arm with red vinyl grip, and latching devices having inside and outside handles and padlock hasp.
- All hardware shall be zinc or cadmium plated.
- Finish shall be prime painted with rust-inhibiting primer.

## Standard Sizes

Door Size (H x W)	Shipping Wt. (lbs.)	
	KRHG	KRHA
2' 0" x 3'	135.0	70.0
2' 6" x 3'	155.0	85.0
2' 6" x 4' 6"	225.0	135.0
2' 6" x 8'	335.0	245.0

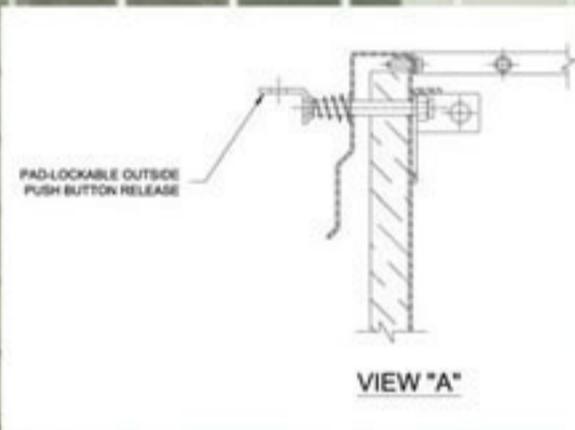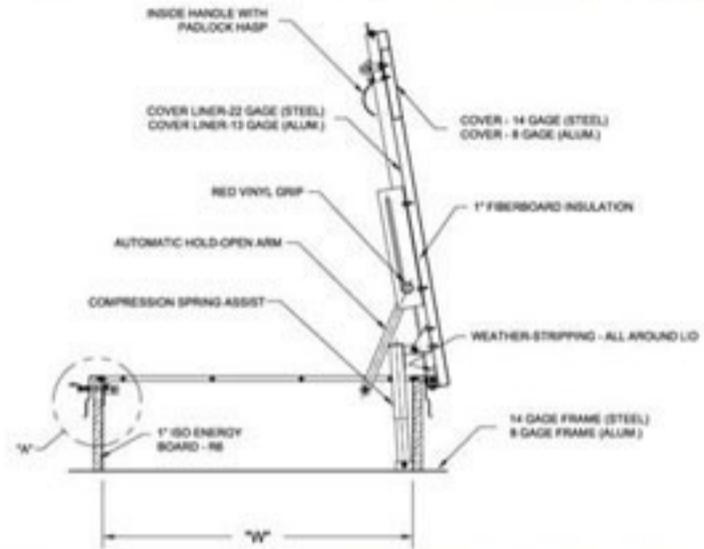

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: [info@novaco.com](mailto:info@novaco.com) • Web Site: [www.novaco.com](http://www.novaco.com)