

Economical Access Doors

HA Plastic Panel


(w/removable-hinged door)

The Handi-Access plastic door is suitable for all surfaces and can be installed easily by applying glue or caulking adhesive to the back of the frame and pressing into place.

Specifications

Access doors shall be type HA.

- Door and frame shall be constructed from 1/8" high impact styrene plastic.
- Door shall have pivot hinge enabling door panel to be hinged or removable.
- Door panel shall be held closed with a snap friction catch and opened without special tools.
- Finish shall be white lightly textured exposed surface for easy painting or wallpapering.

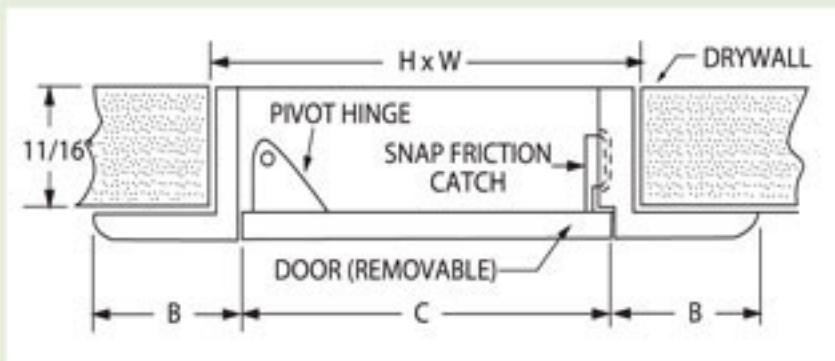

Standard Sizes

Door Size (H x W)	Wall Opening Dimensions				Shipping Wt. (lbs.)
	B	C	H	W	
6 x 4	1	5 3/4	6	4	.3
9 x 6	1	5 3/4	9	6	.5
8 x 8	1	7 3/4	8	8	.6
14 x 14	1 1/4	13 3/4	14	14	1.6
22 x 22	1 1/2	21 5/8	22	22	3.4


DSB-214SM

The DSB-214SM is a surface mounted door that does not require framing, bracing or notching and cutting of inner wall obstructions. Single piece construction of the frame prevents unit from racking and allows door to sit perfectly within frame and to open to 175°.

Specifications

Access doors shall be type DSC-214SM

- On sizes 12" x 12" and smaller, door and frame shall be 16 gauge steel; on larger sizes, door and frame shall be 14 gauge steel.
- Trim shall be one-piece construction with continuous piano hinge.
- Latches shall be flush and screwdriver operated or cylinder lock with dust shutter.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.

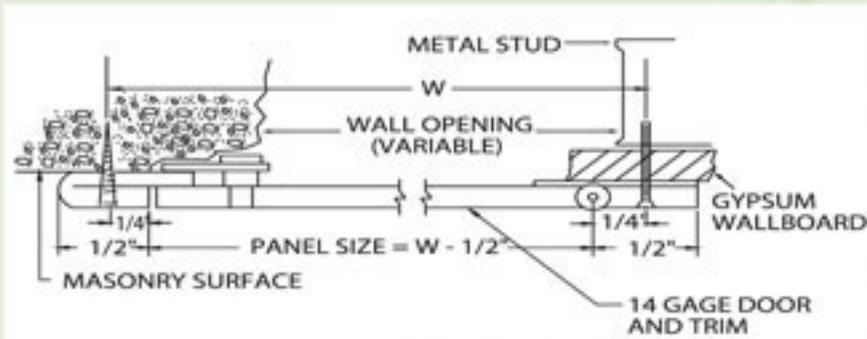

Standard Sizes

Door Size (H x W)	# of Latches	Shipping Wt. (lbs.)
8 x 8	1	1.8
12 x 12	1	4.2
16 x 16	2	7.0
24 x 24	5	13.7