


Universal Access Doors For All Surfaces DSC-214M

The DSC-214M is a distinctly superior door for new installations or for remodeling. The exposed flange adds rigidity to the unit and perfectly conceals the rough wall opening. Flexible anchor straps can be provided for installation within masonry openings.

Specifications

Access doors shall be type DSC-214M

- Frame shall be 16 gauge steel and door 14 gauge steel.
- Trim shall be 3/4" wide, one-piece construction.
- Hinge shall be concealed continuous piano hinge.
- Latches shall be flush and screwdriver operated or cylinder lock with dust shutter.
- Masonry anchor straps can be included on all frames if specified.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel. Stainless steel shall have No. 4 satin polish finish.

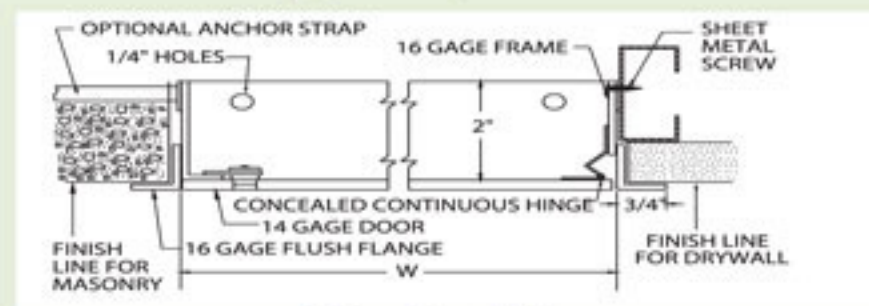

Standard Sizes

Door Size (HxW)	Wall/Ceiling Opening	# of Latches	Shipping Wt. (lbs.)
6 x 6	6 ³ / ₈ x 6 ³ / ₈	1	2.1
8 x 8*	8 ³ / ₈ x 8 ³ / ₈	1	3.1
10 x 10*	10 ³ / ₈ x 10 ³ / ₈	1	4.3
12 x 8	12 ³ / ₈ x 8 ³ / ₈	1	4.6
12 x 12*	12 ³ / ₈ x 12 ³ / ₈	1	6.3
14 x 14	14 ³ / ₈ x 14 ³ / ₈	2	8.1
16 x 12	16 ³ / ₈ x 12 ³ / ₈	2	7.8
16 x 16*	16 ³ / ₈ x 16 ³ / ₈	2	9.9
18 x 12	18 ³ / ₈ x 12 ³ / ₈	2	8.9
18 x 18*	18 ³ / ₈ x 18 ³ / ₈	2	12.2
20 x 16	20 ³ / ₈ x 16 ³ / ₈	2	11.8
22 x 22	22 ³ / ₈ x 22 ³ / ₈	4	16.3
24 x 12	24 ³ / ₈ x 12 ³ / ₈	2	10.6
24 x 18	24 ³ / ₈ x 18 ³ / ₈	2	14.5
24 x 20	24 ³ / ₈ x 20 ³ / ₈	2	16.5
24 x 24*	24 ³ / ₈ x 24 ³ / ₈	5	18.7
30 x 20	30 ³ / ₈ x 20 ³ / ₈	5	20.1
30 x 22	30 ³ / ₈ x 22 ³ / ₈	5	21.7
30 x 24	30 ³ / ₈ x 24 ³ / ₈	5	23.6
30 x 30	30 ³ / ₈ x 30 ³ / ₈	5	27.8
36 x 22	36 ³ / ₈ x 22 ³ / ₈	5	25.6
36 x 24	36 ³ / ₈ x 24 ³ / ₈	5	28.2
36 x 36	36 ³ / ₈ x 36 ³ / ₈	5	36.8
48 x 24	48 ³ / ₈ x 24 ³ / ₈	6	34.4


Access Doors For Drywall Installations KDW

The KDW has a textured frame and bead so drywall joint compound can be applied in sufficient thickness to conceal the flange. Prepunched holes in the flange facilitate fastening the flange to framing members with drywall screws.

Specifications

Access Doors shall be type KDW

- Frame shall be 16 gauge steel and door shall be 14 gauge steel.
- Trim shall be galvanized drywall bead.
- Hinge shall be concealed continuous piano hinge.
- Latches shall be flush and screwdriver operated or cylinder lock with dust shutter.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.

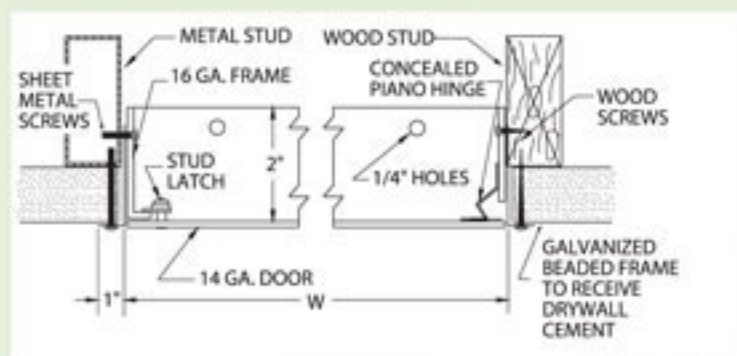

Standard Sizes

Door Size (H x W)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
6 x 6	6 ³ / ₈ x 6 ³ / ₈	1	1.8
8 x 8	8 ³ / ₈ x 8 ³ / ₈	1	2.4
10 x 10	10 ³ / ₈ x 10 ³ / ₈	1	3.3
12 x 12	12 ³ / ₈ x 12 ³ / ₈	1	5.8
14 x 14	14 ³ / ₈ x 14 ³ / ₈	2	6.5
16 x 16	16 ³ / ₈ x 16 ³ / ₈	2	8.8
18 x 18	18 ³ / ₈ x 18 ³ / ₈	2	11.1
22 x 22	22 ³ / ₈ x 22 ³ / ₈	4	15.3
24 x 24	24 ³ / ₈ x 24 ³ / ₈	5	17.2
36 x 24	36 ³ / ₈ x 24 ³ / ₈	5	25.9

Special sizes and modifications available on request.

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com