


Insulated Exterior Access Door

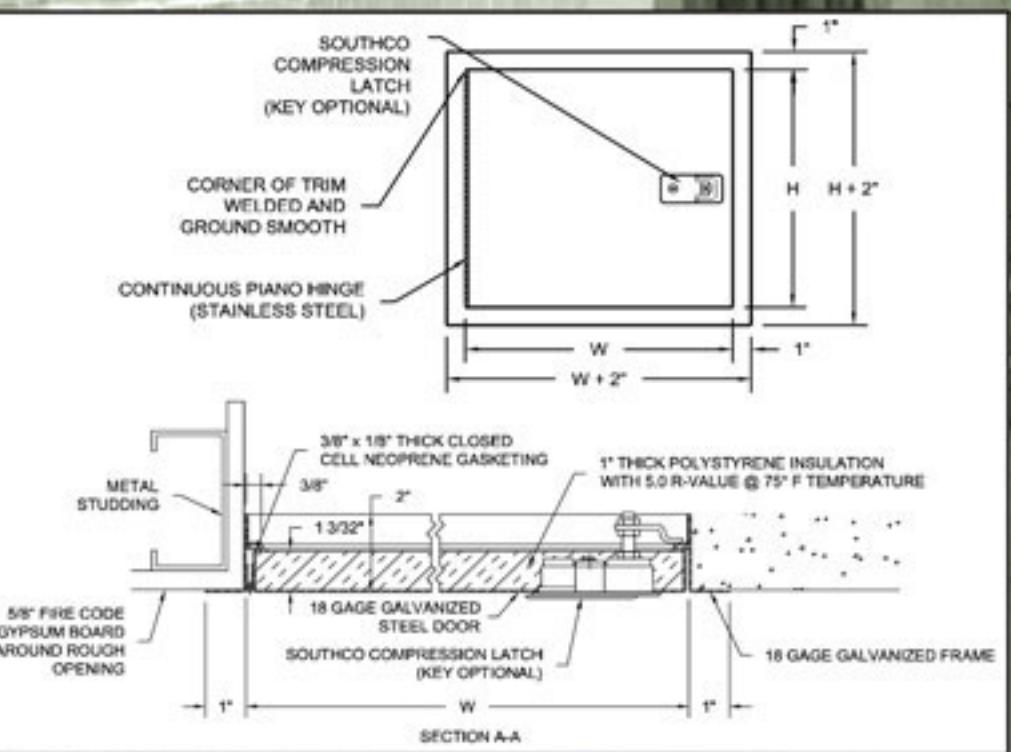

MX

Karp engineered its MX Insulated Exterior Access Door to withstand years of exposure to severe outdoor elements. This high-quality, galvanized steel door comes with a stainless steel hinge. The combination of these components with Karp's electrostatic rust-inhibitive powder finish provides two durable protective layers. To further weatherproof the door, Karp arc-welds and grounds smooth the corners of the trim and pan, which with the addition of closed cell neoprene gasket insures a watertight seal between the door and frame. Finally, the door includes Styrofoam insulation specifically designed for exterior uses because of its exceptional resistance to water and water vapor. All of these protective measures guarantee the MX Insulated Exterior Access Door's long term performance even in the most severe moisture environments.

Now Available with an expansion casing bead with galvanized lath providing a neat tight protected finish between frame and plaster, while furnishing added plaster reinforcement. Product Code: MXPL

Specifications

Access Doors shall be type MX

- Frame shall be 18 gage galvanized steel.
- Door shall be 18 gage galvanized steel.
- Door shall be welded, watertight pan.
- Corners of trim shall be welded & ground smooth.
- Gasketing between door and frame 3/8" wide by 1/8" thick closed cell neoprene gasketing.
- Insulation shall be 1" thick polystyrene w/ 5.0 R-value @75 degree F temperature.
- Hinge shall be continuous stainless steel piano hinge.
- Latches shall be a keyed Lift & Turn Compression Latch including cup sealing gasket finished in textured chrome.
- Finish shall be prime coat of rust-inhibitive electrostatic powder, baked grey enamel. Stainless Steel shall have No. 4 satin polish finish.

Standard Sizes

Door Size (H x W)	Wall /Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
12 x 12	12 $\frac{3}{8}$ x 12 $\frac{3}{8}$	1	6.3
18 x 18	18 $\frac{3}{8}$ x 18 $\frac{3}{8}$	1	10.5
24 x 24	24 $\frac{3}{8}$ x 24 $\frac{3}{8}$	2	16.0

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com