

Economical Access Doors


ME

The ME door provides an economical, superior quality and aesthetically pleasing solution for new construction or remodeling. The frame, return and extended door stop are one piece construction resulting in a maintenance free and durable door.

Specifications

Access doors shall be type ME

- Return, doorstop and 3/4" trim shall be one-piece construction of 16 gauge steel.
- Door shall be 16 gauge steel.
- Hinge shall be concealed continuous piano hinge.
- Latches shall be flush and screwdriver operated or cylinder lock with dust shutter.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.

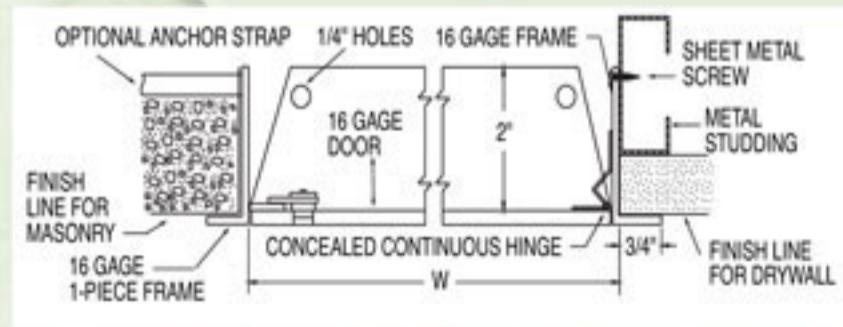

Standard Sizes

Door Size (H x W)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
6 x 6	6 1/4 x 6 1/4	1	1.2
8 x 8*	8 1/4 x 8 1/4	1	2.2
10 x 10*	10 1/4 x 10 1/4	1	3.4
12 x 12*	12 1/4 x 12 1/4	1	4.9
14 x 14	14 1/4 x 14 1/4	2	6.6
16 x 16*	16 1/4 x 16 1/4	2	8.7
18 x 18*	18 1/4 x 18 1/4	2	11.0
20 x 20	20 1/4 x 20 1/4	2	15.6
24 x 24*	24 1/4 x 24 1/4	4	19.6

*These sizes are also standard in stainless steel.

Special sizes and modifications available on request


PF

The Press-Fit door is a unique lightweight door that installs easily by bending the tabs on the return back to grip the drywall. The frame, return and doorstop are one-piece construction with a beveled frame resulting in an attractive finished look.

Specifications

Access doors shall be type PF

- Trim, return and doorstop shall be one-piece construction of 22 gauge steel. On doors 18" x 18" and larger, the door shall be 20 gauge steel. On doors smaller than 18" x 18", the door shall be 22 gauge steel.
- Trim shall be 1/2" wide and beveled.
- Hinge shall be concealed, continuous piano hinge.
- Latches shall be flush and screwdriver operated or cylinder lock with dustshutter.
- Return shall have bendable tabs for easy installation into drywall.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked grey enamel.

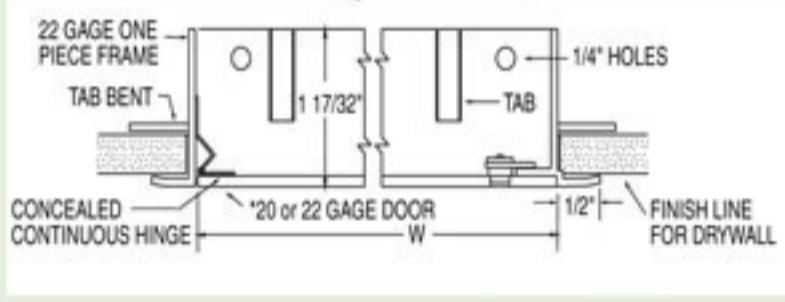

Standard Sizes

Door Size (H x W)	Wall/Ceiling Opening	# of Stud Latches	Shipping Wt. (lbs.)
8 x 8	7 13/16 x 7 13/16	1	1.5
12 x 12	11 13/16 x 11 13/16	1	2.5
14 x 14	13 13/16 x 13 13/16	1	3.0
18 x 18	17 13/16 x 17 13/16	2	4.6
24 x 24	23 13/16 x 23 13/16	2	7.4

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: info@novaco.com • Web Site: www.novaco.com